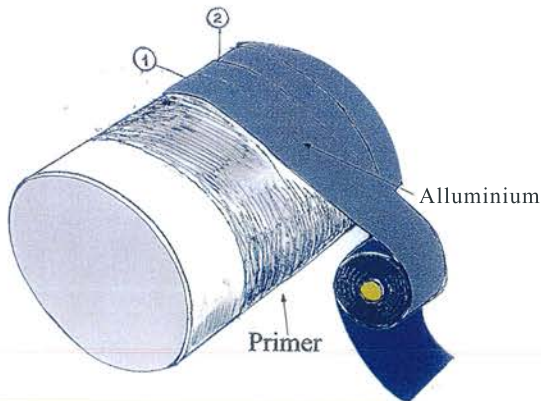


Product Data Sheet
SERIES ALUMINIUM TAPE ALTENE


- Backing** Aluminium poil or PE coated Aluminium or Woven aluminium
Adhesive butyl rubber
Interleaf anti-adhesive Film treated with silicone

Application
Photo


| PRODUCT PROPERTIES | TIPIC VALUES |
|---------------------|------------------------|
| Adhesion | 30 N/cm |
| Breaking Strength | 40 N/cm |
| Moisture Absorption | 0.02 % |
| Temperatura range | 5°C to 50°C |
| Tensile Strength | 0.2 Kg/mm |
| UV Resistance | Excellent |
| Thickness | from 0.8 mm at 2.0 mm. |

The typical values given are the average of minimum and maximum values defined by Coatec s.r.l. for acceptance of the product. The values measured according to standard procedures, are obtained from specimen of samples collected according to Coatec s.r.l. test procedures, and conditioned under controlled conditions. In absence of purchasing specifications for the inspection and acceptance of the product, Coatec s.r.l. will refer to its procedures, conditions and tolerances. Values obtained on site will vary depending on the test methods and conditions. Whilst Coatec s.r.l. warrants its products to be free of material and manufacturing defects, Coatec s.r.l. disclaims any liability in connection with the misure of Coatec s.r.l. products.